
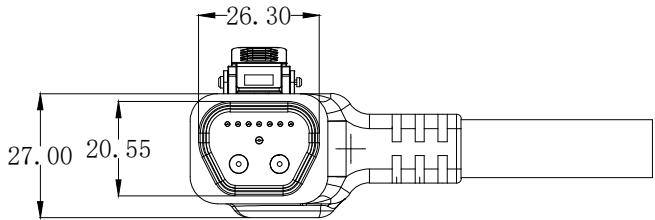
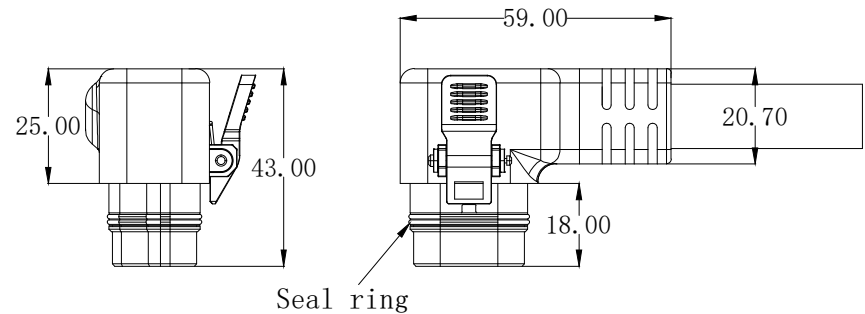
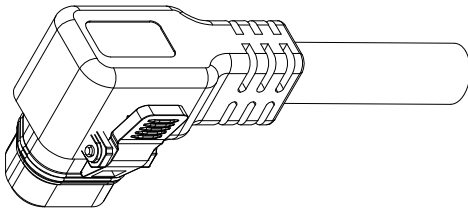


C/N: HLK	P/C:	P/N:	CUSTOMER REV:	APPROVED BY:
----------	------	------	---------------	--------------

REVISIONS			
REV.	DESCRIPTION	DATE	SIGNATURE
△A			
△B			
△C			

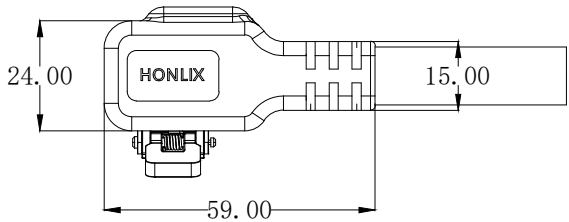

NOTS:

1. Plastic material: PA66+30%GF Black UL94-V0
Molidng: PVC Black
塑胶材质: PA66+30%GF 黑色 UL94-V0
成型料: PVC 黑色
2. Power terminal: Ø4.0 material: copper
电源端子: Ø4.0 材质: 黄铜
3. Rated current: Power: 50A Signal: 2A
额定电流: 电源: 50A 信号: 2A
4. Mechanical operation: ≥5000 cycles
插拔寿命: ≥5000 次
5. Degree of protection: IP67
防护等级: IP67
6. Suitable wire: Power: 8~10AWG Signal: 22AWG
适配线材 电源: 8~10AWG 信号: 22AWG
7. Pull out force: 3~8KG.
与公头保持力 3~8KG.

未注明公差指定 (单位: mm)	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE		<div>HONLIX[®]</div> <div>HONLIX INC. HTTP://WWW.HONLIX.COM</div>		
ENGINEER BY:				
MANAGER BY:		PRODUCT NO: HLK-XXX	DATE: 2023.07.12	
CHECKED BY:		UNIT: mm	SHEET: 1 OF 1	REV.
SEALES BY:		H/C: HLK-525-2		0

1	HLK-525-2	50A 2+1+7PIN Male plug black, Approval:	1PCS
NO.	ITEM	DESCRIPTION	QTY