
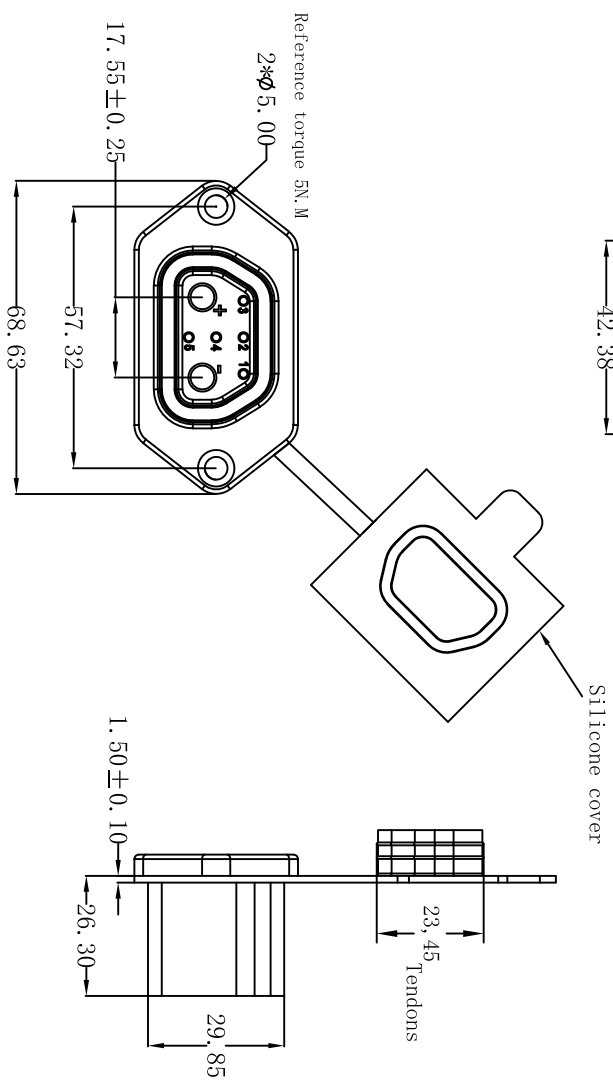


RoHS COMPLIANT

C/N: HLK P/C: P/N:HLK-524 2+5 FEMALE CUSTOMER REV: APPROVED BY:

REVISIONS			
REV.	DESCRIPTION	DATE	SIGNATURE
△A			
△B			
△C			

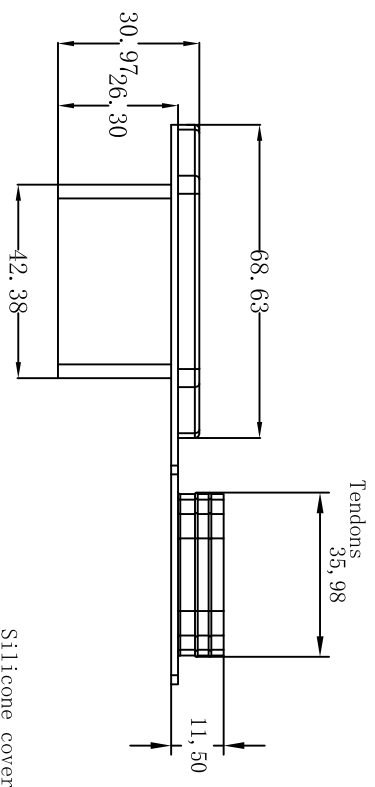

NOTES:

1. Plastic material:PA66+30%GF Black UL94-V0
Molding:PVC Black
塑胶材质:PA66+30%GF 黑色 UL94-V0
- 2.Terminal:
∅5.0*2 Material:Red copper, gold plated
∅1.5*5 Material:Copper, contact gold plated.
端子:
∅5.0*2 材质:黄铜, 镀金
∅1.5*5 材质:黄铜, 触点镀金
3. Rated current:Power:90A, Signal:2A
额定电流:电源:90A 信号:2A
4. Mechanical operation:≥5000 cycles
插拔寿命:≥5000 次
5. Pull out force:20~100N.
与公头保持力20~100N.
6. Ambient temperature (operation):-10~+105°C.
耐温范围:-10~+105°C.

未注明公差指定 (单位:mm)	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE		HONLIX INC. HTTP://WWW.HONLIX.COM	
ENGINEER BY:		PRODUCT NO:	DATE: 2023.12.04
MANAGER BY:		UNIT: mm	SHEET: 1 OF 1
CHECKED BY:		H/C: HLK-524	
SEALS BY:		REV.	0

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.