

# **HONLIX**

Series 6  
REV: 2024/01/01

## 电动汽车连接解决方案 New Energy Vehicle Connectrion Solution



# 公司简介

## Company Profile

**HONLIX**

弘林科电工科技（昆山）有限公司成立于2016年，坐落于中国昆山市张浦镇德国工业园区内，工厂位于江苏昆山和河南南阳。公司专注于新能源电动自行车/滑板车/平衡车，电动摩托车，电动汽车整体连接解决方案，为客户提供一站式解决方案。

公司拥有专业的研发团队+销售团队+制造团队+品保团队，可提供整套连接器，线束组件的设计方案及选型建议，为客户提供优质的产品和快速的交期，具有良好的市场竞争力，得到广大客户的支持和信赖。

公司已经通过ISO9001:2015质量管理体系认证，IATF16949：2016正在规划中，拥有国家专利20余项，产品认证已通过ROHS REACH CE CCC等。

HONLIX Electrician Technology (Kunshan) Co., Ltd. was established in 2016 and is located in the German Industrial Park, Zhangpu Town, Kunshan City, China. The factories are located in Kunshan, Jiangsu and Nanyang, Henan. The company focuses on the overall connection solutions of new energy electric bicycles/scooters/balance vehicles, electric motorcycles, and electric vehicles, providing customers with one-stop solutions.

The company has a professional R & D team + sales team + manufacturing team + quality assurance team, can provide a complete set of connectors, wiring harness components design solutions and selection suggestions, to provide customers with high-quality products and fast delivery, with good market competition We have won the support and trust of our customers.

The company has passed ISO9001:2015 quality management system certification, IATF16949:2016 is under planning, has more than 20 national patents, and product certification has passed ROHS, REACH, CE, CCC, etc.

# 工厂照片 KS/HN Factory



**KUN SHAN Factory**



**HE HAN Factory**

# 资质证书 Company Certificate

# HONLIX



Business License




Letter of Credit




Chinese/English Trademark Certificate



ISO9001:2015

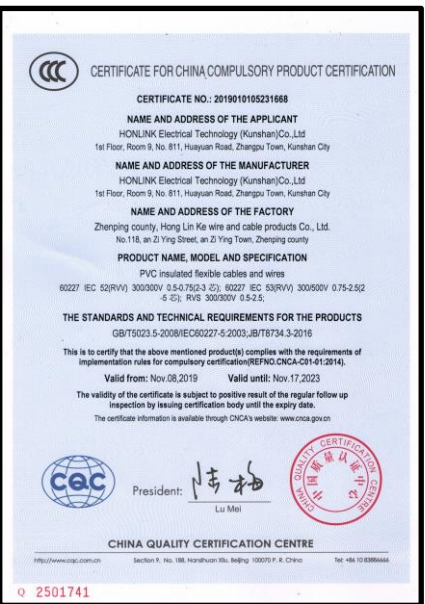

CCC Certificate

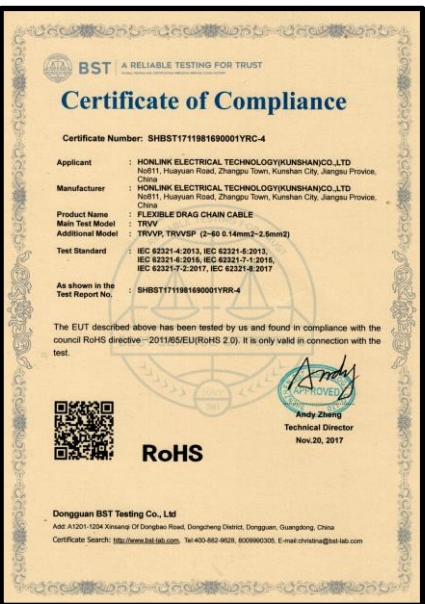

ROHS Certificate



CE Certificate



More than 20 Patent Certificates in China 5



# 目 录

## CONTENS

A. China Electric Vehicle Plug Connector AC-----	7~8
B. Europe Electric Vehicle Plug Connector AC-----	9~13
C. USA Electric Vehicle Plug Connector AC-----	14~15
D. China Electric Vehicle Plug Connector DC-----	16~18
E. EU Electric Vehicle Plug Connector DC-----	19~20
D. US Electric Vehicle Plug Connector DC-----	22~23
E. China/EU/US Electric Vehicle Charger AC 16A Model 2 Basic-----	24~24
F. China/EU/US Discharge Gun-----	25~26
G. European Standard Twin Guns-----	27~27
H. Chinese National Standard Mode 2 Controller-----	28~28
J. China 32A AC Charging Wall-mounted-Single vision-----	29~29
K. China 32A AC Charging Wall-mounted-4G&Wifi vision-----	30~31



**HLK-601**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-601
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	China charging gun 国标交流充电枪
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	250V
Rated current(25°C) 额定工作电流	16A 32A
Withstand voltage 耐电压	2000V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥80N
Insertion force 配线范围	2.5m2*3C+0.75*2C-16A/6.0m2*3C+0.75*2C-32A
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-602**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-602
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	China charging connector 国标充电座
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	250V
Rated current(25°C) 额定工作电流	16A 32A
Withstand voltage 耐电压	2000V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥80N
Insertion force 配线范围	2.5m2*3C+0.75*2C-16A/6.0m2*3C+0.75*2C-32A
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	





**HLK-603**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-603
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	EU charging gun 欧标交流充电枪
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	250V
Rated current(25°C) 额定工作电流	16A 32A
Withstand voltage 耐电压	2000V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥80N
Insertion force 配线范围	2.5m2*3C+0.75*2C-16A/6.0m2*3C+0.75*2C-32A
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**[HLK-604](#)**  
**[URL Download](#)**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-604
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	EU charging connector 欧标充电座1代
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	250V
Rated current(25°C) 额定工作电流	16A 32A
Withstand voltage 耐电压	2000V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥80N
Insertion force 配线范围	2.5m2*3C+0.75*2C-16A/6.0m2*3C+0.75*2C-32A
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-604-1**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-604-1
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	EU charging connector 欧标充电座2代
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	250V
Rated current(25°C) 额定工作电流	16A 32A
Withstand voltage 耐电压	2000V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥80N
Insertion force 配线范围	2.5m2*3C+0.75*2C-16A/6.0m2*3C+0.75*2C-32A
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-604-2**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-604-2
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	Pile end European standard charging stand 桩端欧标充电座
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	250V
Rated current(25°C) 额定工作电流	16A 32A
Withstand voltage 耐电压	2000V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥80N
Insertion force 配线范围	2.5m2*3C+0.75*2C-16A/6.0m2*3C+0.75*2C-32A
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-604-3**  
**[URL Download](#)**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-604-3
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	EU charging connector 欧标充电座3代
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	250V
Rated current(25°C) 额定工作电流	16A 32A
Withstand voltage 耐电压	2000V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥80N
Insertion force 配线范围	2.5m2*3C+0.75*2C-16A/6.0m2*3C+0.75*2C-32A
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-605**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-605
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	US charging gun 美标交流充电枪
Product Spec 规格型号	5PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	125V
Rated current(25°C) 额定工作电流	16A 32A
Withstand voltage 耐电压	2000V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥80N
Insertion force 配线范围	2.5m2*3C+0.75*2C-16A/6.0m2*3C+0.75*2C-32A
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-606**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-606
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	US charging connector 美标充电座
Product Spec 规格型号	5PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	250V
Rated current(25°C) 额定工作电流	16A 32A
Withstand voltage 耐电压	2000V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥80N
Insertion force 配线范围	2.5m2*3C+0.75*2C-16A/6.0m2*3C+0.75*2C-32A
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-607**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-607
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	China charging gun 国标直流充电枪
Product Spec 规格型号	9PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	80A/125A/200A/250A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 2*25/35/50/70/80+1*25+2*4+7*1+2(2*1)
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	





**HLK-607-1**

**URL Download**

**Small DC GB Charging Gun**

**国标小直流充电枪**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-607-1
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	China charging gun 国标直流充电枪
Product Spec 规格型号	9PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	20A/32A/40A/50A/60A/80A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	Ref SPEe
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-608**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-608
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	China charging gun 国标直流充电座
Product Spec 规格型号	9PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	80A/125A/200A/250A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 2*25/35/50/70/80+1*25+2*4+7*1+2(2*1)
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-609**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-609
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	EU DC charging gun EU交直流充电枪
Product Spec 规格型号	5PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	80A/125A/200A/250A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 2*25/35/50/70/80+1*25+2*4+7*1+2(2*1)
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-610**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-610
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	EU charging gun 欧标交直流充电座
Product Spec 规格型号	9PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	80A/125A/200A/250A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 2*25/35/50/70/80+1*25+2*4+7*1+2(2*1)
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-611**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-611
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	US DC charging gun US交直流充电枪
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	80A/125A/200A/250A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 2*25/35/50/70/80+1*25+2*4+7*1+2(2*1)
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**[HLK-611-1](#)**  
**[URL Download](#)**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-611-1
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	NACS charging gun 特斯拉交直流充电枪
Product Spec 规格型号	5PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	16A/32A/40A/48A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	2*14AWG+3*22AWG; 2*10AWG+3*22A WG; 2*9AWG+3*22AWG; 2*8AWG+3*2 2AWG
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-612**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-612
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	US charging gun美标交直流充电座
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	80A/125A/200A/250A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 2*25/35/50/70/80+1*25+2*4+7*1+2(2*1)
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**[HLK-613](#) [HLK-614](#) [HLK-615](#)  
**[URL Download](#)****

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-613 614 615
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	China/EU/US 16A AC Charging Model-2
Product Spec 规格型号	9PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	16A 3.5KW
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 3*2.5+2*0.75
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	





**HLK-617**  
**[URL Download](#)**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-617
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	National Standard Discharge Gun
Product Spec 规格型号	9PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	16A / 32A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 3*2.5mm2 EV 3*6.0mm2
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-618**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-618
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	EU Standard Discharge Gun
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	16A / 32A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 3*2.5mm2 EV 3*6.0mm2
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-620**  
**URL Download**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-620
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	EU Standard Twin Guns
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	16A / 32A
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 3*2.5mm2 EV 3*6.0mm2
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**[HLK-621 Pro](#)**  
**[URL Download](#)**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-620 Pro
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	模式二国标控制盒 3.5kw 16A 220V Mode 2 National Standard Control Box 3.5kw 16A 220V
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	16A 220V 3.5kw
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 3*2.5mm2 EV 3*6.0mm2
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-625 HLK-626 HLK-627**

**URL Download**

**GB/EU/US Single vision**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-625/626/627
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	GB/EU/US 7kw AC Single version
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	32A 7KW
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 3*2.5+2*0.75
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-628 HLK-629 HLK-630**

**URL Download**

**4 "LCD Screen APP Version Bluetooth WIFI**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-628/629/630
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	GB/EU/US 7kw AC 4G&WIFI 4 "LCD screen
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	32A 7KW
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 3*2.5+2*0.75
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	



**HLK-631 HLK-632 HLK-633**

**URL Download**

**7 "LCD Screen APP Version Bluetooth WIFI**

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-631/632/633
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
<b>General features: 一般特性:</b>	
Product Name 产品名称	GB/EU/US 7kw AC 4G&WIFI 7 "LCD screen
Product Spec 规格型号	7PIN Male
Connector locking system 互锁	Interlock
Ingree of protection ratings 防护等级	IP55
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8536901900
Environmental compliance 环保等级	RoHs, Reach
<b>Electrical parameters: 电气参数:</b>	
Rated voltage 电压等级	1000V
Rated current(25°C) 额定工作电流	32A 7KW
Withstand voltage 耐电压	AC 3000V 250V/50HZ/1Min PASS
Contact resistance 接触电阻	≥0.5mΩ Max
Insulation resistance 绝缘电阻	≥500MΩ/DC500V
<b>Mechanical performance: 机械参数:</b>	
Mechanical life 插拔寿命	≤10000 mating cycles
Insertion force 插入力	≤140N
Pull out force 拔出力	≥70N
Insertion force 配线范围	EV 3*2.5+2*0.75
<b>Application Area: 应用领域</b>	
Charger for Motorcycles and electric vehicles 电动汽车, 电动摩托车等领域	

**HONLIX**



For more information, please visit our website  
<http://www.honlix.com>