


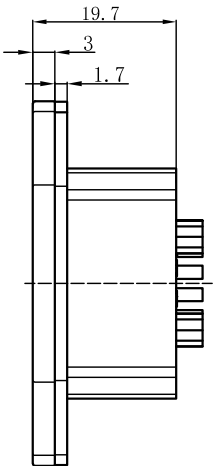


REVISIONS			
REV.	DESCRIPTION	DATE	SIGNATURE
A			
B			
C			

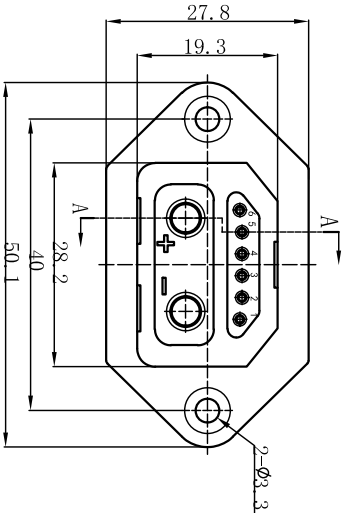

SPECIFICATION	
Rated Operating Voltage	150V
Rated Current	Power50A*2C+Signal2A*6C
Peak Current	50A/Continuous
Insulation Resistance	500MΩ/150V DC
Withstand Voltage/AC	2500V Power/1500VSignal
Durability	5000 Cycles
IP Rating	Mated:IP55 Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Material)
Operating Temperature	-40℃~125℃
UV Resistance Grade	N/A
Mating Part No	HLK-507
Maximum Cable Range	OD≤14mm

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINITION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

①	HLK-508	50A 2+6 PIN Female Connector	1PCS
NO.	ITEM	DESCRIPTION	QTY

SIGNATURE			
ENGINEER BY:	Mandy Hoo	HONLIX® HONLIX INC. HTTP://WWW.HONLIX.COM	
MANAGER BY:	John Han		
CHECKED BY:	David Wang		
SEALES BY:	Eleven Wang		
		PRODUCT NO:HLK-508	DATE: 2025.04.08
		UNIT: mm	SHEET: 1 OF 1
		H/C: HLK-508	REV.
			0