



C/N: HONLIX	P/C: HLK-401-2	P/N: HLK-401-2 2+4PIN Cabinet Side	CUSTOMER REV:	APPROVED BY:	REVISIONS			
					REV.	DESCRIPTION	DATE	SIGNATURE
					A			
					B			
					C			

REVISIONS		
REV.	DESCRIPTION	DATE
A		
B		
C		

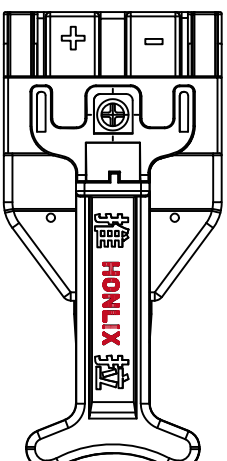

SPECIFICATION	
Rated Operating Voltage	150V
Rated Current	Power:50A*2C+Signal:2A*4C
Peek Current	50A/Continuous
Insulation Resistance	500MΩ/150V DC
Withstand Voltage/AC	2500V Power/1500VSignal
Durability	10000 Cycles
IP Rating	Mated:IP55 Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40℃~125℃
UV Resistance Grade	N/A
Mating Part No	HLK-400-1
Maximum Cable Range	OD≤10mm

Technical drawing of a cable connector. A dimension line at the top indicates a length of 14,80. The drawing shows a cross-section of the connector with internal components and a cable with multiple conductors.

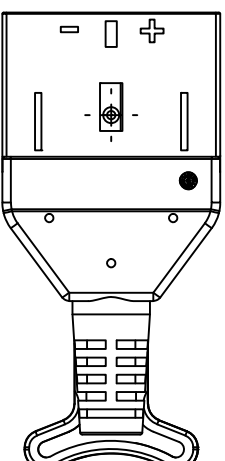

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

①	HLK-401-2	50A 2+4PIN Switching cabinet side	1PCS
NO.	ITEM	DESCRIPTION	QTY

SIGNATURE		HONLIX INC. HTTP://WWW.HONLIX.COM	
ENGINEER BY:	Mandy Hao	PRODUCT NO:HLK-401-2	
MANAGER BY:	John Han	UNIT: mm	DATE: 2025.04.08
CHECKED BY:	David Wang	SHEET: 1 OF 1	REV.
SEALS BY:	Eleven Wang	H/C: HLK-401-2	
		0	