


△			
△			
△			

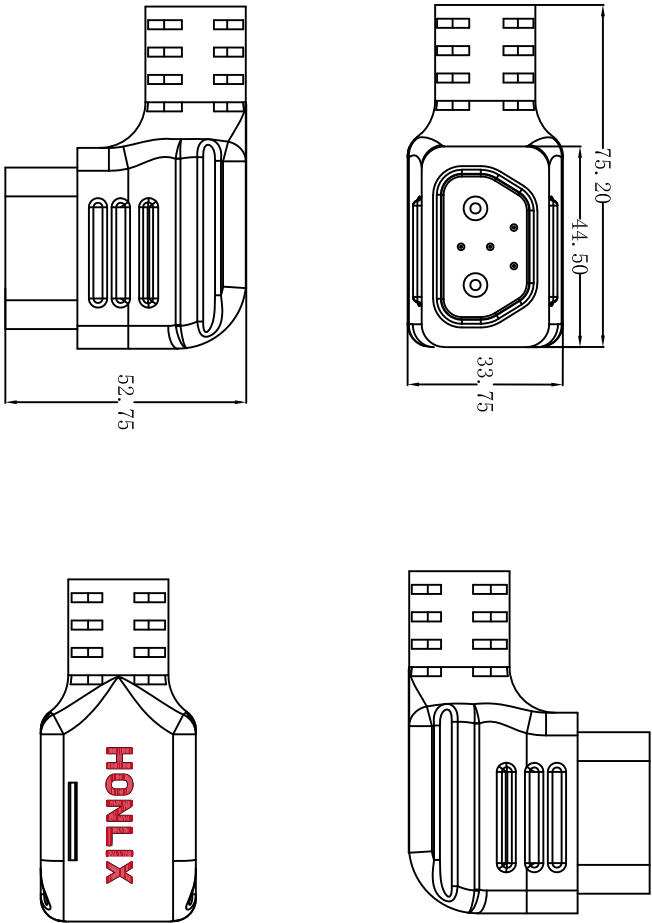

SPECIFICATION	
Rated Operating Voltage	150V DC
Rated Current	Power150A*2C+Signal2A*4C
Peak Current	150A
Insulation Resistance	500MΩ/150V DC
Withstand Voltage/AC	2500V Power/1500VSignal
Durability	10000 Cycles
IP Rating	Material:IP55 Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40℃~125℃
UV Resistance Grade	N/A
Mating Part No	HLK-520
Maximum Cable Range	OD≤50mm2

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE		HONLIX® HONLIX INC. HTTP://WWW.HONLIX.COM		
ENGINEER BY: Mandy Hao				
MANAGER BY: John Hon				
CHECKED BY: David Wang				
SEALES BY: Eleven Wang				
PRODUCT NO:HLK-XXX		DATE: 2025.04.10		
UNIT: mm		SHEET: 1 OF 1	REV.	
H/C:HLK-519				
①	HLK-519	150A 2+4PIN Male Connector	1PCS	
NO.	ITEM	DESCRIPTION	QTY	
THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.				