
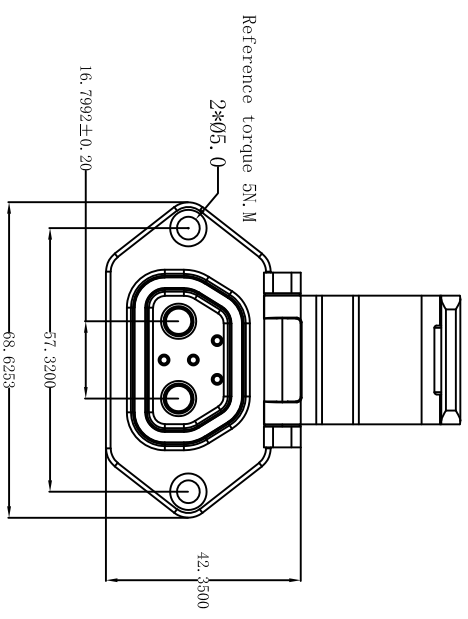
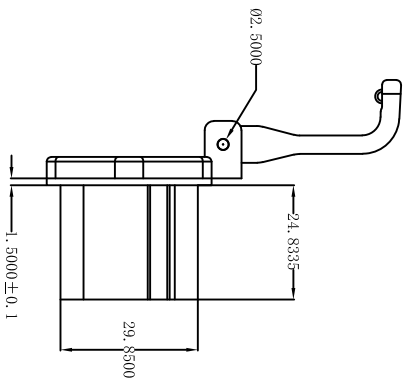


REVISIONS			
REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			

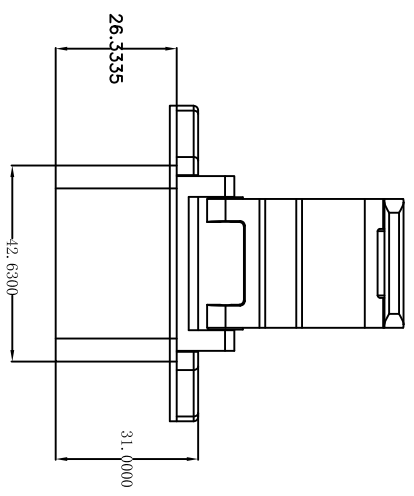

SPECIFICATION	
Rated Operating Voltage	150V DC
Rated Current	Power150A*2C+Signal2A*4C
Peek Current	150A
Insulation Resistance	500MΩ/150V DC
Withstand Voltage/AC	2500V Power/1500VSignal
Durability	10000 Cycles
IP Rating	Mated:IP55 Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40c~125c
UV Resistance Grade	N/A
Mating Part No	HLK-520
Maximum Cable Range	OD≤50mm2

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

①	HLK-520	150A 2+4PIN Female Connector	1PCS
NO.	ITEM	DESCRIPTION	QTY

SIGNATURE		HONLIX® HONLIX INC. HTTP://WWW.HONLIX.COM	
ENGINEER BY:	Mandy Hao		
MANAGER BY:	John Han		
CHECKED BY:	David Wang		
SEALS BY:	Eleven Wang		
PRODUCT NO:HLK-520		DATE: 2025.04.10	REV.
UNIT: mm		SHEET: 1 OF 1	
H/C:HLK-520			

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.