
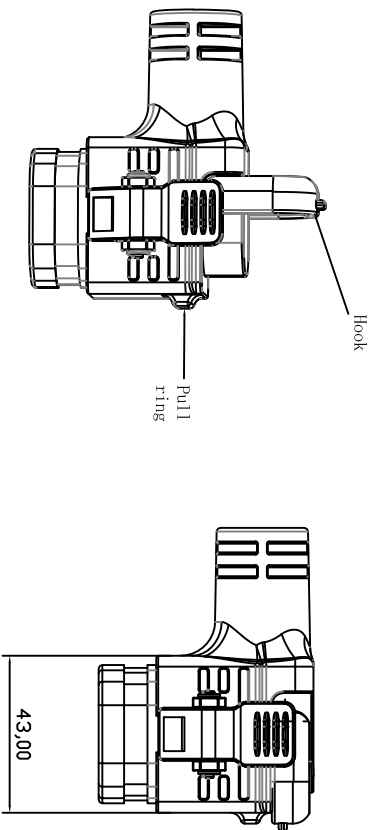

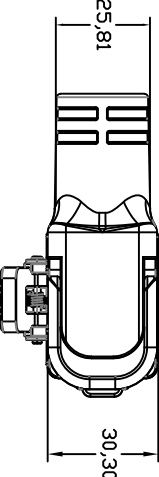
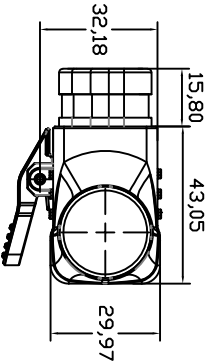


C/N:	HONLIX	P/C: HLK-527-2	P/N: HLK-527 100A MAX 2+7PIN	CUSTOMER REV:	APPROVED BY:
------	--------	----------------	------------------------------	---------------	--------------

REVISIONS			
REV.	DESCRIPTION	DATE	SIGANTURE
A			
B			
C			

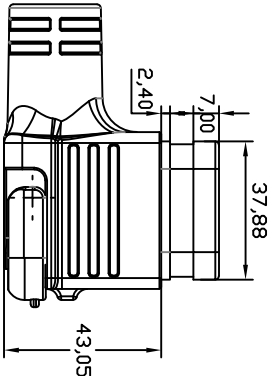

SPECIFICATION	
Rated Operating Voltage	150V
Rated Current	Power100A*2C+Signal2A*7C
Peak Current	100A/Continuous
Insulation Resistance	500MQ/150V DC
Withstand Voltage/AC	2500V Power/1500V/Signal
Durability	5000 Cycles
IP Rating	Mated:IP55 Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40℃~125℃
UV Resistance Grade	N/A
Mating Part No	HLK-528
Maximum Cable Range	0D≤19mm

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrently	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

①	HLK-527-2	100A MAX 2+7PIN male Hook style	1PCS
NO.	ITEM	DESCRIPTION	QTY

SIGNATURE			
ENGINEER BY:	Mandy Hoo	HONLIX® HONLIX INC. HTTP://WWW.HONLIX.COM	
MANAGER BY:	John Han		
CHECKED BY:	David Wang		
SEALS BY:	Eleven Wang		
		PRODUCT NO:HLK-527	DATE: 2025.04.08
		UNIT: mm	SHEET: 1 OF 1
		H/C: HLK-527	
			REV. 0

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.