
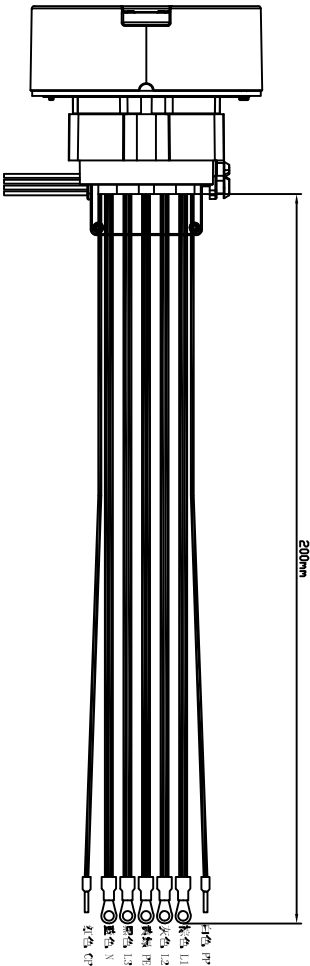
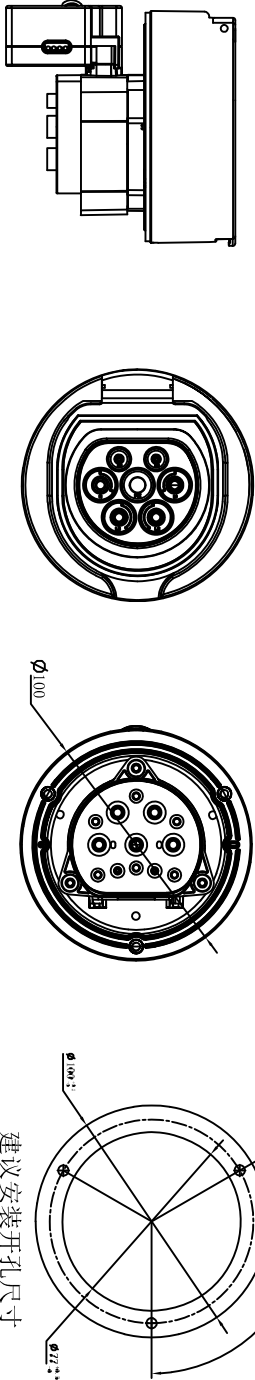


REVISIONS		
REV.	DESCRIPTION	DATE
△		
△		
△		

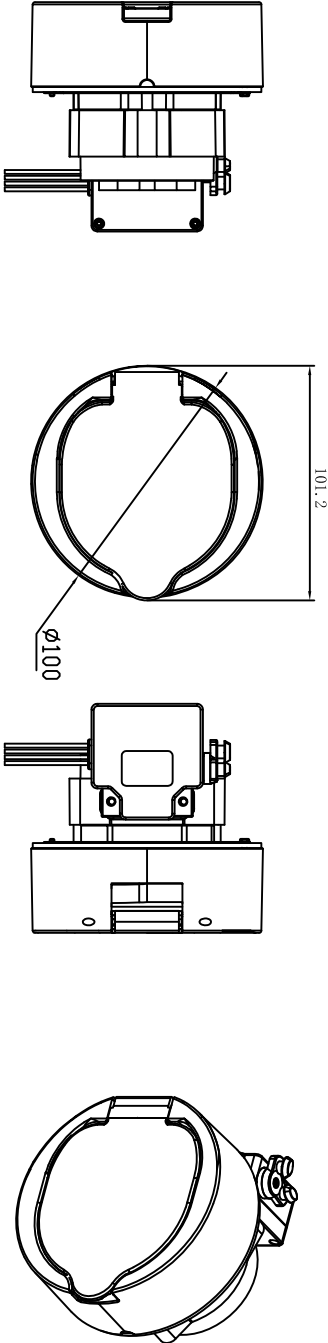

SPECIFICATION	
Rated Operating Voltage	440V AC
Rated Current	16A 32A
Peak Current	N/A
Insulation Resistance	≥1000mΩ
Withstand Voltage/AC	2500V Power/1500VSignal
Durability	10000 Cycles
IP Rating	Mated:IP55 Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materinols)
Operating Temperature	-30℃~105℃
UV Resistance Grade	N/A
Mating Part No	/
Maximum Cable Range	OD≤16mm

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

①	HLK-604-2	HLK-604-2 EU AC Socket 16A/32A IEC 62196-2:2022	1PCS
NO.	ITEM	DESCRIPTION	QTY

SIGNATURE	
ENGINEER BY:	Mandy Hao
MANAGER BY:	John Han
CHECKED BY:	David Wang
SCALES BY:	Eleven Wang

HONLIX [®] HONLIX INC. HTTP://WWW.HONLIX.COM		
PRODUCT NO:HLK-604-2		DATE: 2025.04.11
UNIT: mm	SHEET: 1 OF 1	REV.
H/C: HLK-604-2		0