


C/N:HONLIX P/C:100A Rhombic P/N: HLK-207


CUSTOMER REV:

APPROVED BY:

REVISIONS		
REV.	DESCRIPTION	DATE SIGNATURE
△		
△		
△		

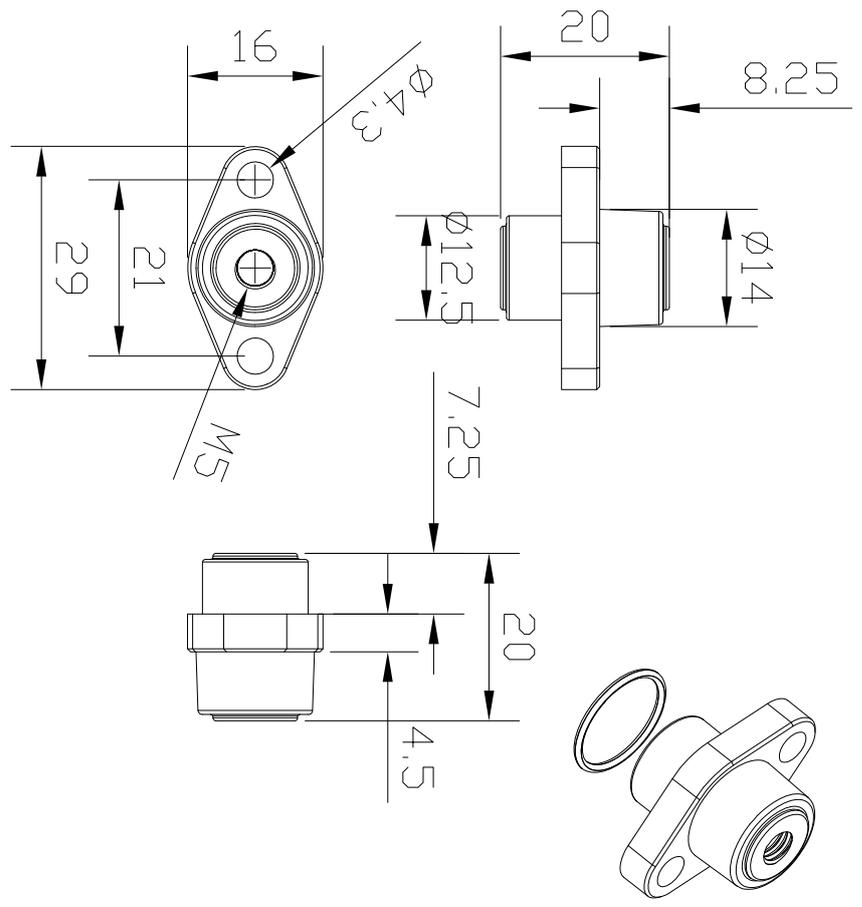

开孔尺寸，箱体内部连接M3.5防水螺母
Opening size, M3.5 waterproof nut for internal box connection

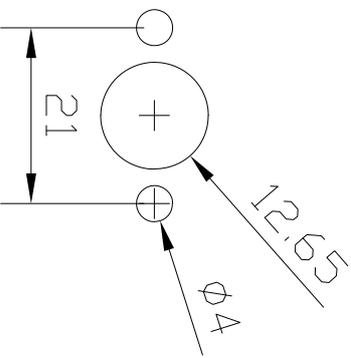

① NO.	ITEM	DESCRIPTION	QTY
HLK-207	100A Rhombic Terminal Block H62 Nickel Plated/Tin Plated PA66+GF30 BK/RD	1PCS	

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.

SPECIFICATION	
Rated Operating Voltage	1000V DC
Rated Current	100A
Peak Current	110A/3seconds
Insulation Resistance	500MΩ/150V DC
Withstand Voltage/AC	2500V Power/1500V/Signal
Durability	N/A Cycles
IP Rating	Material: N/A Unmated: N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40°C~125°C
UV Resistance Grade	N/A
Mating Part No	N/A
Maximum Cable Range	N/A

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE	
ENGINEER BY:	Mandy Hoo
MANAGER BY:	John Han
CHECKED BY:	David Wang
SEALES BY:	Eleven Wang

HONLIX INC. HONLIX.COM		DATE: 2025.03.25	
PRODUCT NO: HLK-207		SHEET: 1 OF 1	
UNIT: mm		REV. 0	
H/C: HLK-207			

HONLIX
HTTP://WWW.HONLIX.COM