


C/N:HONLIX P/C:150A Rhombic P/N: HLK-208


CUSTOMER REV:

APPROVED BY:


REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			

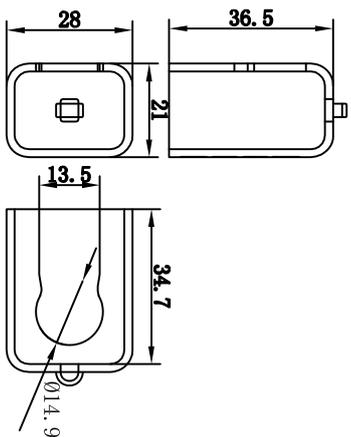


护盖/Bonnet

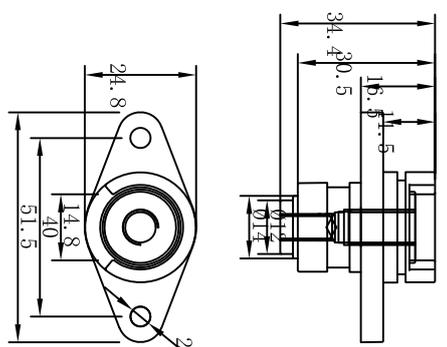

主体/Body



开孔尺寸
Hole Size

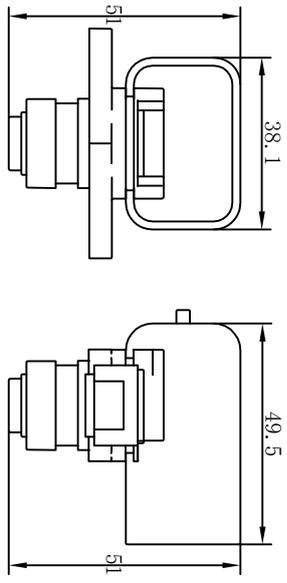

组合/Assembly

SPECIFICATION

Rated Operating Voltage	1000V
Rated Current	150A
Peak Current	165A/3seconds
Insulation Resistance	500MΩ/150V DC
Withstand Voltage/AC	2500V Power/1500VSignal
Durability	N/A Cycles
IP Rating	Material: N/A Unmated: N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40°C~125°C
UV Resistance Grade	N/A
Mating Part No	N/A
Maximum Cable Range	N/A

TERMS OF BUSINESS

MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMATED TOLERANCE DEFINATION

0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

HONLIX HONLIX INC. HTP://WWW.HONLIX.COM

NO.	ITEM	DESCRIPTION	QTY
①	HLK-208	150A Rhombic Terminal Block H62 Nickel Plated/Tin Plated PA66+GF30 BK/RD	1PCS

SIGNATURE		DATE: 2025.04.01	
ENGINEER BY:	Mandy Hoo	UNIT: mm	SHEET: 1 OF 1
MANAGER BY:	John Han	H/C: HLK-208	
CHECKED BY:	David Wang	REV. 0	
SALES BY:	Eleven Wang		

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.