


C/N:HONLIXP/c:300A Rhombic P/N: HLK-210

CUSTOMER REV:

APPROVED BY:

REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			

REVISIONS			
REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			

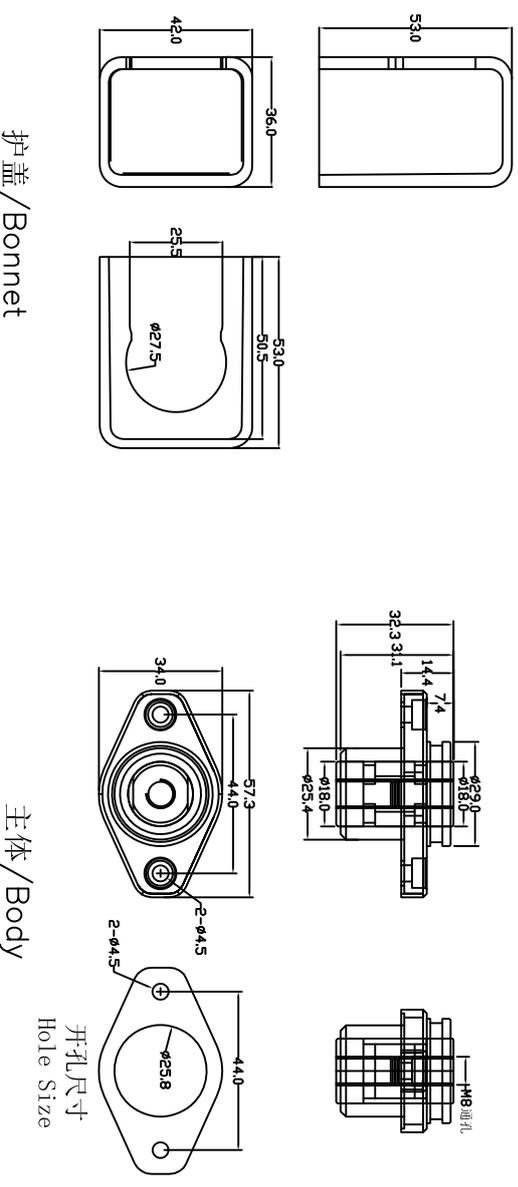


护盖/Bonnet

主体/Body

开孔尺寸  
Hole Size

组合/Assembly

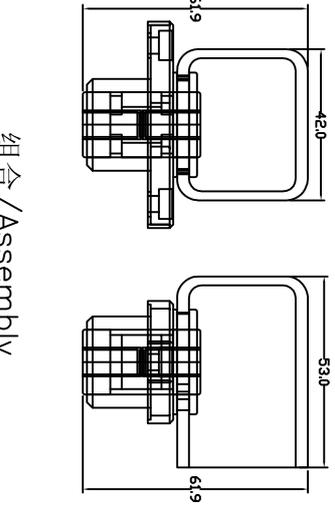

NO.	ITEM	DESCRIPTION	QTY
①	HLK-210	300A Rhombic Terminal Block H62 Nickel Plated/Tin Plated BK/RD 1PCS	

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.

SPECIFICATION	
Rated Operating Voltage	1000V DC
Rated Current	300A
Peak Current	310A/3seconds
Insulation Resistance	N/A
Withstand Voltage/AC	2500V Power/1500V/Signal
Durability	N/A Cycles
IP Rating	Material: N/A Unmated: N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40°C~125°C
UV Resistance Grade	N/A
Mating Part No	N/A
Maximum Cable Range	N/A

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARKED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE	
ENGINEER BY:	Mandy Hao
MANAGER BY:	John Han
CHECKED BY:	David Wang
SEALES BY:	Eleven Wang

PRODUCT NO:HLK-210	DATE: 2025.04.08
UNIT: mm	SHEET: 1 OF 1
H/C: HLK-210	REV. 0

**HONLIX** HONLIX INC.  
HTTP://WWW.HONLIX.COM