


C/N:HONLIX P/C:100A Square

P/N: HLK-213

CUSTOMER REV:


APPROVED BY:

REVISIONS			
REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			

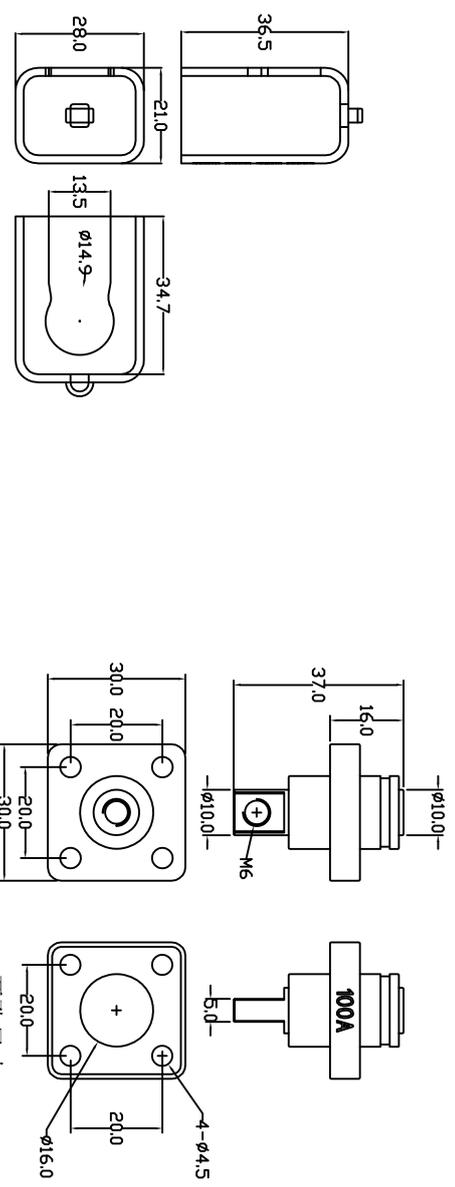

护盖/Bonnet

主体/Body

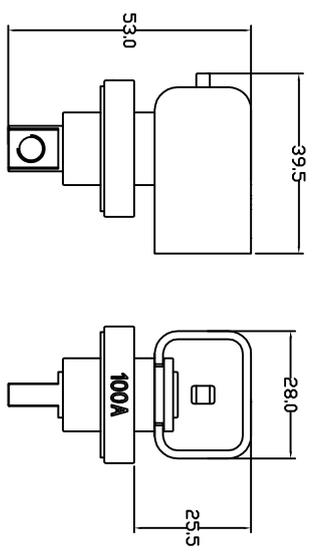

组合/Assembly

NO.	ITEM	DESCRIPTION	QTY
①	HLK-213	100A Square Terminal Block H62 Nickel Plated/Tin Plated BK/RD	1PCS

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.

SPECIFICATION	
Rated Operating Voltage	1000V DC
Rated Current	100A
Peak Current	110A/3seconds
Insulation Resistance	N/A
Withstand Voltage/AC	2500V Power/1500VSignal
Durability	N/A Cycles
IP Rating	Mated:N/A Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Meterials)
Operating Temperature	-40c~125c
UV Resistance Grade	N/A
Mating Part No	N/A
Maximum Cable Range	N/A

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warranty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE	
ENGINEER BY:	Mandy Hoo
MANAGER BY:	John Han
CHECKED BY:	David Wang
SEALES BY:	Eleven Wang

HONLIX INC.	
HTTP://WWW.HONLIX.COM	
PRODUCT NO:HLK-213	DATE: 2025.04.08
UNIT: mm	SHEET: 1 OF 1
H/C: HLK-213	
REV.	0