


C/N:HONLIX P/C:200A Square P/N: HLK-216

CUSTOMER REV:


APPROVED BY:

REV.	DESCRIPTION	DATE	SIGNATURE
△1			
△2			
△3			


REVISIONS		
REV.	DESCRIPTION	DATE
△1		
△2		
△3		

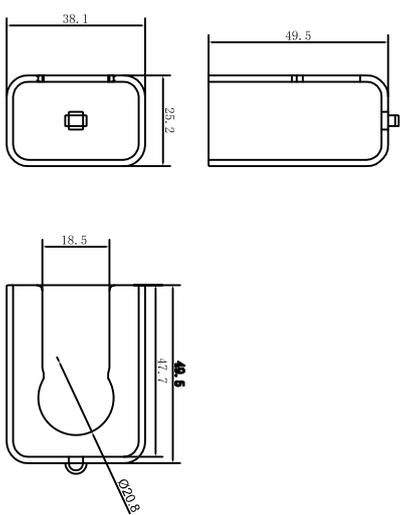

护盖/Bonnet

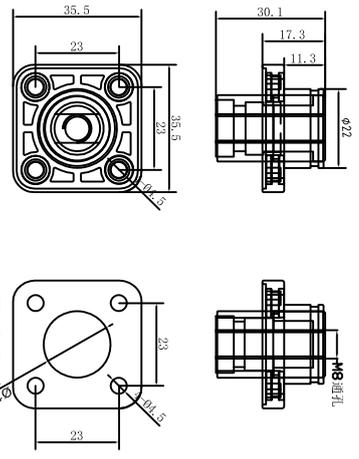

主体/Body

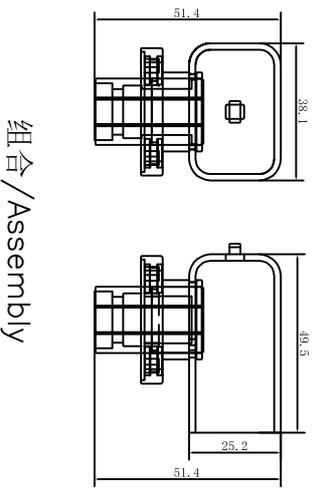

组合/Assembly

NO.	ITEM	DESCRIPTION	QTY
①	HLK-216	200A Square Terminal Block H62 Nickel Plated/Tin Plated BK/RD	1PCS

SIGNATURE	
ENGINEER BY: Mandy Hoo	MANAGER BY: John Han
CHECKED BY: David Wang	SALES BY: Eleven Wang

PRODUCT NO:HLK-216		DATE: 2025.04.08	
UNIT: mm	SHEET: 1 OF 1	REV. 0	
H/C: HLK-216			

**HONLIX** HONLIX INC.  
[HTTP://WWW.HONLIX.COM](http://www.honlix.com)

SPECIFICATION	
Rated Operating Voltage	1000V DC
Rated Current	200A
Peak Current	220A/3Seconds
Insulation Resistance	N/A
Withstand Voltage/AC	2500V Power/1500V/Signal
Durability	N/A Cycles
IP Rating	Mated:N/A Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40℃~125℃
UV Resistance Grade	N/A
Mating Part No	N/A
Maximum Cable Range	N/A

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMATED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.