

C/N:HONLIX P/C:250A Global P/N: HLK-218




CUSTOMER REV:

APPROVED BY:

REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			


REVISIONS

盖子是透明的  
The cover is transparent

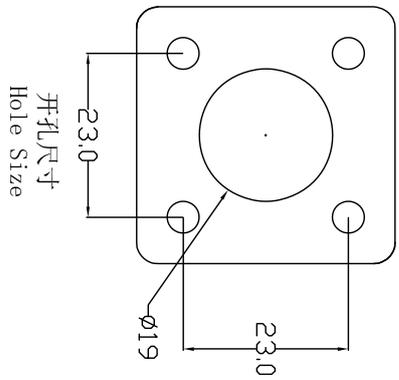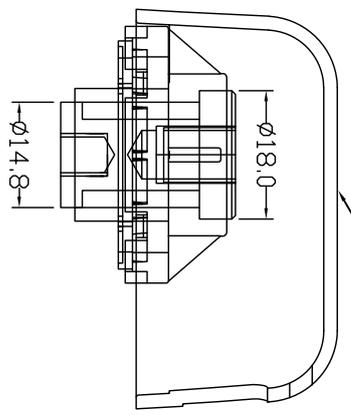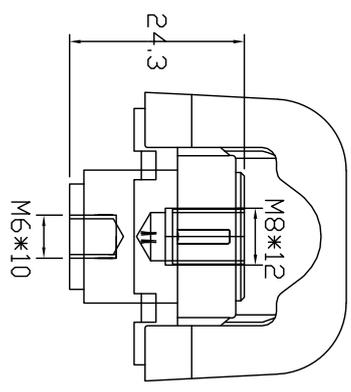

护盖/Bonnet

主体/Body

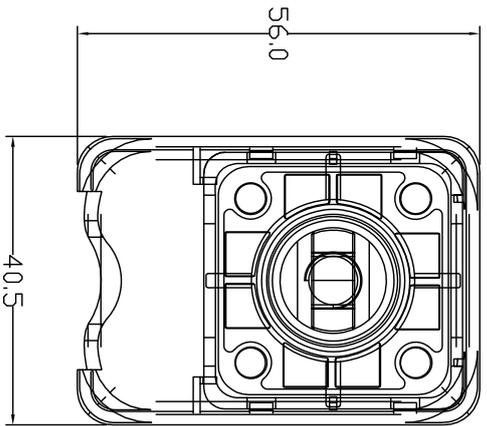

组合/Assembly

NO.	ITEM	DESCRIPTION	QTY
①	HLK-218	250A Square Terminal Block H62 Nickel Plated/Tin Plated BK/RD	1PCS

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.

SIGNATURE		HONLIX INC. HONLIX.COM HTTP://WWW.HONLIX.COM	
ENGINEER BY:	Mandy Hoo	PRODUCT NO:HLK-218	DATE: 2025.04.08
MANAGER BY:	John Han	UNIT: mm	SHEET: 1 OF 1
CHECKED BY:	David Wang	H/C: HLK-218	
SEALS BY:	Eleven Wang	REV.	0

SPECIFICATION

Rated Operating Voltage	1000V DC
Rated Current	250A
Peak Current	275/35seconds
Insulation Resistance	N/A
Withstand Voltage/AC	2500V Power/1500VSignal
Durability	N/A Cycles
IP Rating	Rated:N/A Unrated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40C~125C
UV Resistance Grade	N/A
Mating Part No	N/A
Maximum Cable Range	N/A

TERMS OF BUSINESS

MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION

0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2