


REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			

启停电池瞬间大电流专用端子_双螺纹
Start-stop battery instant high current terminal_double threaded

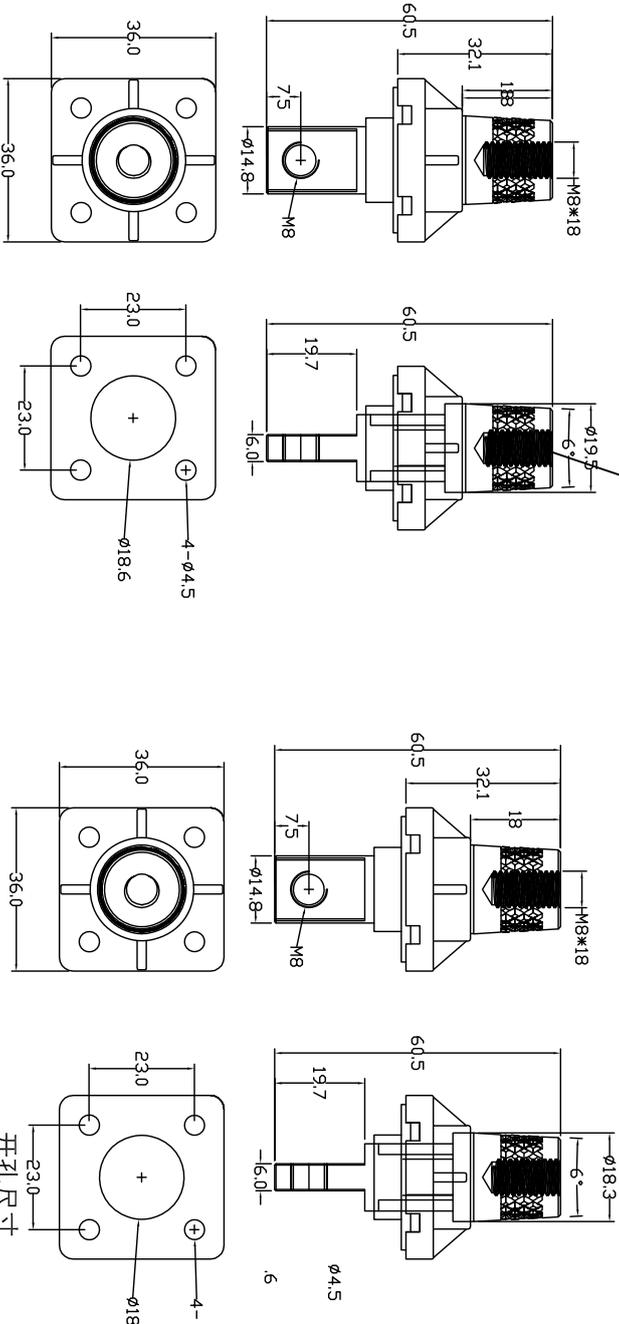

正极/Positive pole

负极/Negative pole

开孔尺寸
Hole Size

SPECIFICATION

Rated Operating Voltage	1000V DC
Rated Current	250A
Peak Current	275A/3Seconds
Insulation Resistance	N/A
Withstand Voltage/AC	2500V Power/1500V/Signal
Durability	N/A Cycles
IP Rating	Mated:N/A Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Material)
Operating Temperature	-40C~125C
UV Resistance Grade	N/A
Mating Part No	N/A
Maximum Cable Range	N/A

TERMS OF BUSINESS

MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARRED TOLERANCE DEFINITION

0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE

ENGINEER BY:	Mandy Hao
MANAGER BY:	John Han
CHECKED BY:	David Wang
SEALES BY:	Eleven Wang

HONLIX HONLIX INC.
HTTP://WWW.HONLIX.COM

PRODUCT NO:HLK-221 DATE: 2025.04.08

UNIT: mm SHEET: 1 OF 1 REV.

H/C: HLK-221 0

NO.	ITEM	DESCRIPTION	QTY
①	HLK-221	250A Square Terminal Block H62 Nickel Plated/Tin Plated BK/RD	1PCS

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.