

## 2 系\_储能连接解决方案

## 2 Series\_Energy Storage Connectivity Solutions



# 公司简介

## Company Profile

弘林科创建于2015年，是全球知名的大功率连接器整体方案提供商，拥有ISO9001, ISO14001, IATF16949管理体系认证，通过了CE RoHS REACH等国际测试认证，同时也获得中国国家知识产权局授权专利约30项左右，是中国国家科技型创新企业，弘林科在全球拥有2个制造工厂（分别位于中国昆山/河南南阳），5个销售公司（中国/日本/泰国/韩国/美国）

弘林科拥有资深专业的模具设计加工，自动化制造能力，完整的检测设备及技术，打造全球一流的连接器品牌，服务全球用户；同时我们具有强大的定制化能力，依据不同客户的差异化需求，提供专业，高效，快捷的定制化连接解决方案，为顾客创造价值。

弘林科专注于新能源连接器，其中1系\_M5/M8/M12/M16圆型连接器，2系\_储能连接器，3系\_电动自行车连接器，4系\_电动工具连接器，5系\_电动摩托车连接器，6系\_电动汽车充电枪/座，7系充电桩及放电枪等一站式解决方案。

Founded in 2015, Honlix is a world-renowned total solution provider of high power connectors with ISO9001, ISO14001, IATF16949 management system certification, passed CE RoHS REACH and other international testing and certification, and also obtained about 30 patents authorized by China National Intellectual Property Patent Office, which is a national science and technology-based innovative enterprise in China.

Honlix has 2 manufacturing factories (located in Kunshan, China / Nanyang, Henan Province) and 5 sales companies (China / Japan / Thailand / Korea / USA)

Honlix has experienced and professional mold design and processing, automated manufacturing capabilities, complete testing equipment and technology to build a global first-class connector brand to serve the global user; at the same time, we have a strong ability to customize, according to the different customer needs, to provide professional, efficient, and effective connectors to meet different needs. At the same time, we have a strong customization ability, according to the differentiated needs of different customers, to provide professional, efficient, fast customized connection solutions, to create value for customers.

Honlix specializes in new energy connectors, including Series 1\_M5/M8/M12/M16 circular connectors, Series 2\_energy storage connectors, Series 3\_electric bicycle connectors, Series 4\_electric tool connectors, Series 5\_electric motorcycle connectors, Series 6\_electric vehicle charging guns/mounts, Series 7 charging piles and discharging guns, and other one-stop solutions.

**Honlix's New HQ**



Ownership of Honlix's HQ buliding

**公司简介**  
**Company Profile**



昆山工厂  
Kunshan Factory



河南工厂  
Henan Factory


## 资质证书 Certificates



ISO90001



ISO14000

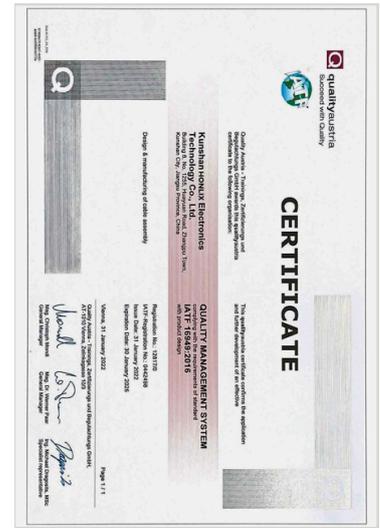

TS16949



CE



RoHS



CE



Utility model patents



Appearance Patent



EIA report

## 全球服务 Global Services



1. Kunshan, China\_factory
2. Henan, China\_factory
3. Shanghai, China\_office
4. Yokohama, Japan\_office
5. Seoul, Korea\_office
6. California, USA\_office
7. Bangkok, Thailand\_office

1. 中国昆山\_工厂
2. 中国河南\_工厂
3. 中国上海\_销售办公室
4. 日本横滨\_销售办公室
5. 韩国首尔\_销售办公室
6. 美国加州\_销售办公室
7. 泰国曼谷\_销售办公室

# 储能连接器应用 Energy Storage Connectors Application

6.0 Male



6.0 Female



Terminal block



Start-Stop Battery Terminal



**2系\_产品目录**  
**2 Series\_Contents**

**1.  $\phi$ 6.0 120A Single Core Energy Storage Connectors**

HLK-201  $\phi$ 6.0 Male -----1  
 HLK-202  $\phi$ 6.0 Female-----2

**2.  $\phi$ 8.0 200A Single Core Energy Storage Connectors**

HLK-203  $\phi$ 8.0 Male -----3  
 HLK-204  $\phi$ 8.0 Female-----4

**3. Rhombic Terminal Block**

HLK-207 100A Double-threaded-----5  
 HLK-208 150A Double-threaded-----6  
 HLK-209 150A Signal-threaded-----7  
 HLK-210 300A Double-threaded-----8  
 HLK-211 500A Double-threaded-----9

**3. Square Terminal Block**

HLK-212 100A Double-threaded-----10  
 HLK-213 100A Signal-threaded-----11  
 HLK-214 120A Double-threaded-----12  
 HLK-215 120A Signal-threaded-----13  
 HLK-216 200A Double-threaded-----14  
 HLK-217 200A Signal-threaded-----15  
 HLK-218 200A Double-threaded Customization-----16  
 HLK-219 200A Signal-threaded Customization-----17  
 HLK-220 250A Double-threaded Start-stop Power Terminal Block-----18  
 HLK-221 250A Signal-threaded Start-stop Power Terminal Block-----19  
 HLK-222 300A Double-threaded-----20  
 HLK-223 300A Signal-threaded-----21  
 HLK-224 500A Double-threaded-----20  
 HLK-225 500A Signal-threaded-----21

## HLK-201

- $\varnothing 6.0$  公
- $\varnothing 6.0$  Male

### 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

### 产品功能特点 Product Points

- 防水IP67
- IP67 (Mated)
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





### 技术参数 Technical Data

- |                          |   |                          |                       |
|--------------------------|---|--------------------------|-----------------------|
| • 额定电流:                  | 120A  | • 端子接线方式:                | 铆压                    |
| • Rated current:         | 120A  | • Terminal Connection:   | Riveting and pressing |
| • 额定电压:                  | 1000V DC  | • 盐雾测试:                  | 48 H                  |
| • Rated voltage:         | 1000V DC  | • Salt spray resistance  | 48 H                  |
| • 绝缘电阻:                  | $\geq 500M\Omega$                               | • 耐电压 :                  | 3000V AC              |
| • Insulation resistance: | $\geq 500M\Omega$                               | • Withstand voltage :    | 3000V AC              |
| • 阻燃等级:                  | UL94V-0   | • 机械寿命:                  | $\geq 3000$ 次         |
| • Flame retardant rating | UL94V-0   | • Flame retardant rating | $\geq 3000$ cycles    |
| • 使用环境:                  | $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ | • 拔出力:                   | $\geq 2\text{N}$      |
| • Operating temperature: | $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ | • Pull-out force:        | $\geq 2\text{N}$      |
| • 防护等级:                  | IP67 (公母互配后)                                    | • 环保等级:                  | RoHS                  |
| • IP grade:              | IP67 (mated)                                    | • Environmental grade:   | RoHS                  |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension

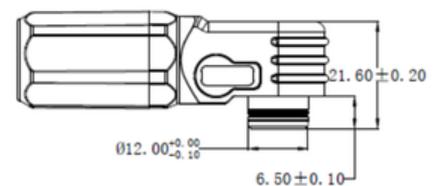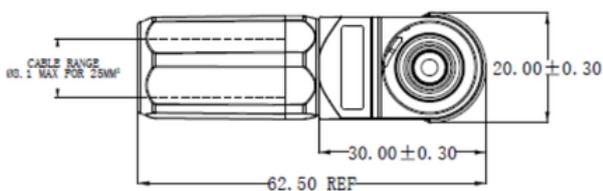

推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-201 download online  
honlix.com](http://honlix.com)

## HLK-202

- φ6.0 母
- φ6.0 Female

### 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

### 产品功能特点 Product Points

- 防水IP67
- IP67 (Mated)
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size






### 技术参数 Technical Data

- |                          |                |                          |                       |
|--------------------------|----------------|--------------------------|-----------------------|
| • 额定电流:                  | 120A           | • 端子接线方式:                | 铆压                    |
| • Rated current:         | 120A           | • Terminal Connection:   | Riveting and pressing |
| • 额定电压:                  | 1000V DC       | • 盐雾测试:                  | 48 H                  |
| • Rated voltage:         | 1000V DC       | • Salt spray resistance  | 48 H                  |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 3000V AC              |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 3000V AC              |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次               |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles          |
| • 使用环境:                  | -40°C ~ +105°C | • 拔出力:                   | ≥2N                   |
| • Operating temperature: | -40°C ~ +105°C | • Pull-out force:        | ≥2N                   |
| • 防护等级:                  | IP67 (公母互配后)   | • 环保等级:                  | RoHS                  |
| • IP grade:              | IP67 (mated)   | • Environmental grade:   | RoHS                  |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension

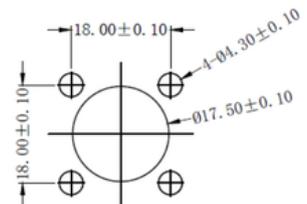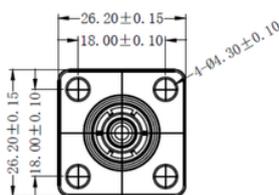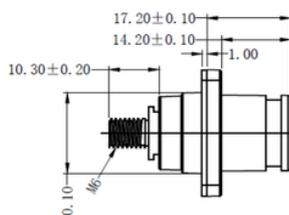

推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-202 download online  
honlix.com](http://honlix.com)

## HLK-203

- $\varnothing 8.0$  公
- $\varnothing 8.0$  Male

### 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

### 产品功能特点 Product Points

- 防水IP67
- IP67 (Mated)
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





### 技术参数 Technical Data

- |                          |   |                          |                       |
|--------------------------|---|--------------------------|-----------------------|
| • 额定电流:                  | 200A  | • 端子接线方式:                | 铆压                    |
| • Rated current:         | 200A  | • Terminal Connection:   | Riveting and pressing |
| • 额定电压:                  | 1000V DC  | • 盐雾测试:                  | 48 H                  |
| • Rated voltage:         | 1000V DC  | • Salt spray resistance  | 48 H                  |
| • 绝缘电阻:                  | $\geq 500M\Omega$                               | • 耐电压 :                  | 3000V AC              |
| • Insulation resistance: | $\geq 500M\Omega$                               | • Withstand voltage :    | 3000V AC              |
| • 阻燃等级:                  | UL94V-0   | • 机械寿命:                  | $\geq 3000$ 次         |
| • Flame retardant rating | UL94V-0   | • Flame retardant rating | $\geq 3000$ cycles    |
| • 使用环境:                  | $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ | • 拔出力:                   | $\geq 2\text{N}$      |
| • Operating temperature: | $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ | • Pull-out force:        | $\geq 2\text{N}$      |
| • 防护等级:                  | IP67 (公母互配后)                                    | • 环保等级:                  | RoHS                  |
| • IP grade:              | IP67 (mated)                                    | • Environmental grade:   | RoHS                  |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension

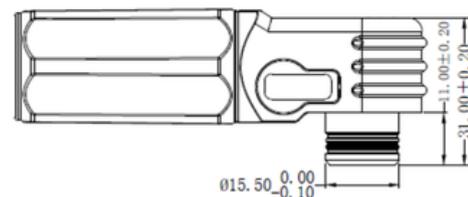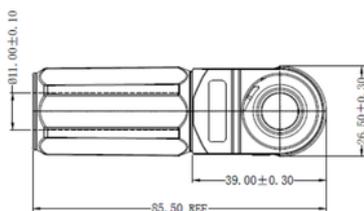

推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-203 download online  
honlix.com](https://www.honlix.com)

## HLK-204

- $\varnothing 8.0$  公
- $\varnothing 8.0$  Male

### 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

### 产品功能特点 Product Points

- 防水IP67
- IP67 (Mated)
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size






### 技术参数 Technical Data

- |                          |   |                          |                       |
|--------------------------|---|--------------------------|-----------------------|
| • 额定电流:                  | 200A  | • 端子接线方式:                | 铆压                    |
| • Rated current:         | 200A  | • Terminal Connection:   | Riveting and pressing |
| • 额定电压:                  | 1000V DC  | • 盐雾测试:                  | 48 H                  |
| • Rated voltage:         | 1000V DC  | • Salt spray resistance  | 48 H                  |
| • 绝缘电阻:                  | $\geq 500M\Omega$                               | • 耐电压 :                  | 3000V AC              |
| • Insulation resistance: | $\geq 500M\Omega$                               | • Withstand voltage :    | 3000V AC              |
| • 阻燃等级:                  | UL94V-0   | • 机械寿命:                  | $\geq 3000$ 次         |
| • Flame retardant rating | UL94V-0   | • Flame retardant rating | $\geq 3000$ cycles    |
| • 使用环境:                  | $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ | • 拔出力:                   | $\geq 2\text{N}$      |
| • Operating temperature: | $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ | • Pull-out force:        | $\geq 2\text{N}$      |
| • 防护等级:                  | IP67 (公母互配后)                                    | • 环保等级:                  | RoHS                  |
| • IP grade:              | IP67 (mated)                                    | • Environmental grade:   | RoHS                  |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension



[HLK-204 download online  
honlix.com](http://HLK-204.download.online.honlix.com)

推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

## HLK-207

- 菱形100A 双螺纹 H59/PA66 2\*M5 孔距21mm
- Diamond 100A Double Thread H59/PA66 2\*M5 Hole Distance 21mm

## 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

## 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





## 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 100A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 100A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

## 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

## 产品尺寸 Product dimension

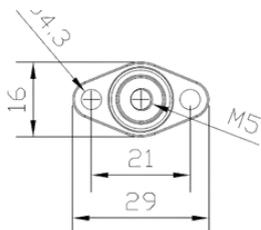

开孔尺寸, 箱体内部连接M3.5防水螺母  
Opening size, M3.5 waterproof nut for internal box connection

推荐面板安装尺寸

Recommended Panel Mounting Dimensions

[HLK-207 download online  
honlix.com](http://honlix.com)

## HLK-208

- 菱形150A 双螺纹 H62/PA66 2\*M4 孔距40mm
- Diamond 150A Double Thread H62/PA66 2\*M4 Hole Distance 40mm

## 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

## 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





## 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 150A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 150A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

## 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

## 产品尺寸 Product dimension

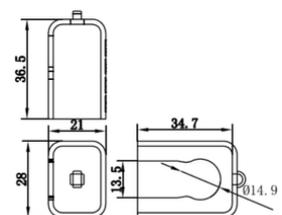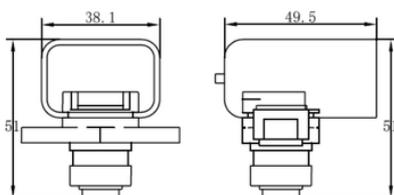

推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-208 download online  
honlix.com](https://www.honlix.com)

## HLK-209

- 菱形150A 单螺纹 H62/PA66 2\*M4 孔距40mm
- Diamond 150A Signal Thread H62/PA66 2\*M4 Hole Distance 40mm

## 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

## 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





## 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 150A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 150A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

## 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

## 产品尺寸 Product dimension

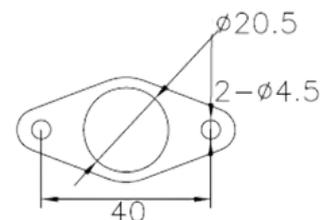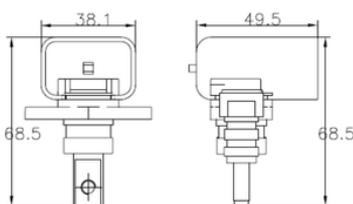

推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-209 download online  
honlix.com](https://www.honlix.com)

## HLK-210

- 菱形300A 双螺纹 H62/PA66 2\*M4 孔距44mm
- Diamond 300A Signal Thread H62/PA66 2\*M4 Hole Distance 44mm

## 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

## 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





## 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 300A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 300A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

## 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

## 产品尺寸 Product dimension

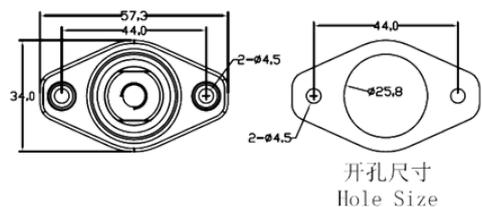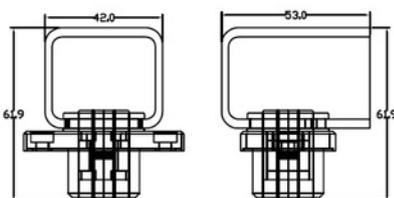

开孔尺寸  
Hole Size

推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-210 download online  
honlix.com](http://honlix.com)

## HLK-211

- 菱形500A 双螺纹 紫铜/PA66 2\*M4 孔距44mm
- Diamond 500A Signal Thread Red Copper/PA66 2\*M4 Hole Distance 44mm

## 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

## 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





## 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 500A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 500A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

## 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

## 产品尺寸 Product dimension

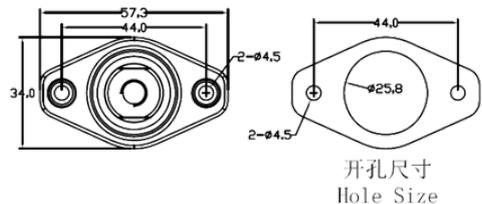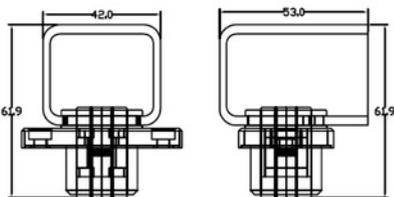

推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-211 download online  
honlix.com](http://honlix.com)

## HLK-212

- 方形100A 双螺纹，H62/PA66 孔距20\*20mm
- Square 100A Double Thread H62/PA66 Hole Pitch 20\*20mm

### 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

### 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





### 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 100A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 100A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension

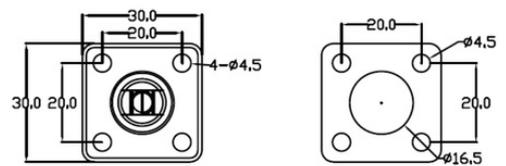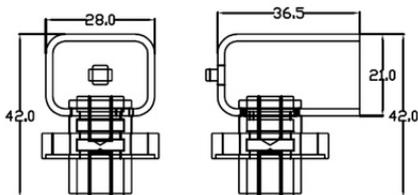

开孔尺寸  
Hole Size

推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-212 download online  
honlix.com](http://honlix.com)

## HLK-213

- 方形100A 单螺纹，H62/PA66 孔距20\*20mm
- Square 100A Signal Thread H62/PA66 Hole Pitch 20\*20mm

## 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

## 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





## 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 100A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 100A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

## 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

## 产品尺寸 Product dimension

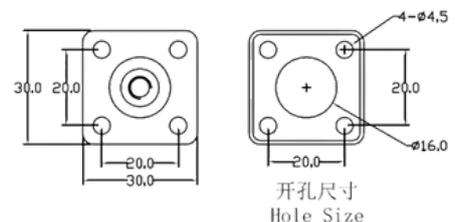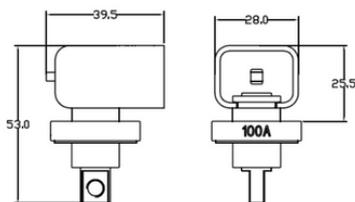

推荐面板安装尺寸

Recommended Panel Mounting Dimensions

[HLK-213 download online  
honlix.com](http://honlix.com)

## HLK-214

- 方形120A 双螺纹，H62/PA66 孔距20\*20mm
- Square 120A Double Thread H62/PA66 Hole Pitch 20\*20mm

## 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

## 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





## 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 120A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 120A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

## 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

## 产品尺寸 Product dimension

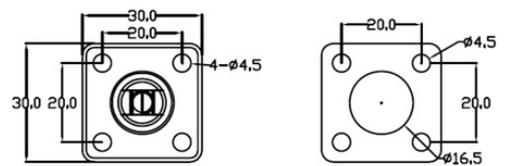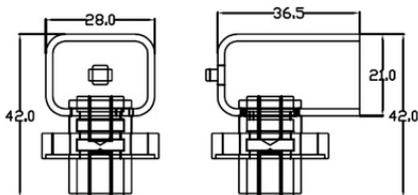

开孔尺寸  
Hole Size

推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-214 download online  
honlix.com](http://honlix.com)

## HLK-215

- 方形120A 单螺纹，H62/PA66 孔距20\*20mm
- Square 120A Signal Thread H62/PA66 Hole Pitch 20\*20mm

### 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

### 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





### 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 120A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 120A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension

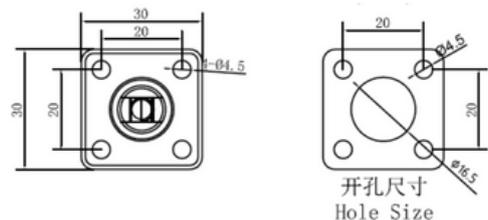

推荐面板安装尺寸

Recommended Panel Mounting Dimensions

[HLK-215 download online honlix.com](http://honlix.com)

## HLK-216

- 方形 200A 双螺纹，H62/PA66 孔距23\*23mm
- Square 200A Double Thread H62/PA66 Hole Pitch 23\*23mm

## 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

## 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





## 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 200A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 200A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

## 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

## 产品尺寸 Product dimension

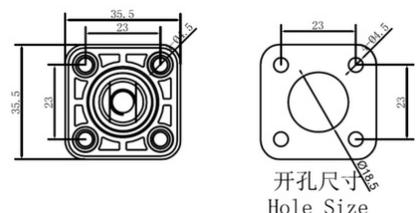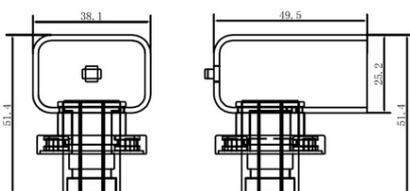

推荐面板安装尺寸

Recommended Panel Mounting Dimensions

[HLK-216 download online  
honlix.com](http://honlix.com)



## HLK-218

- 方形 200A 双螺纹, H62/PA66 孔距23\*23mm\_外贸专供
- Square 200A Double Thread H62/PA66 Hole Pitch 23\*23mm\_Global customization

### 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

### 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size



### 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 200A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 200A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension



推荐面板安装尺寸

Recommended Panel Mounting Dimensions

[HLK-218 download online  
honlix.com](http://honlix.com)

## HLK-219

- 方形 200A 单螺纹, H62/PA66 孔距23\*23mm\_外贸专供
- Square 200A Signal Thread H62/PA66 Hole Pitch 23\*23mm\_Global customization

### 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

### 产品功能特点 Product Points

- 性价比极高
- Excellent value
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size



### 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 200A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 200A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension



推荐面板安装尺寸

Recommended Panel Mounting Dimensions

[HLK-219 download online honlix.com](http://honlix.com)

## HLK-220

- 强启 方形 250A 圆锥双螺纹 H62/PA66 孔距23\*23
- Qiangqi Square 250A Tapered Double Thread H62/PA66 Hole Pitch 23\*23

### 应用领域 Application Areas

- 启停电源与通讯连接传输
- Start-stop power and communication connection transmission

### 产品功能特点 Product Points

- 支持瞬间大电流使用场景
- Supports instantaneous high current usage scenarios
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





### 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 250A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 250A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension

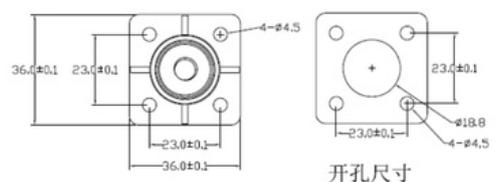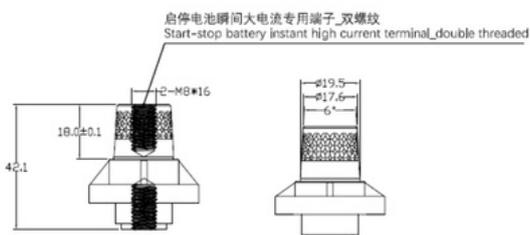

开孔尺寸  
负极/Negative pole  
推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-220 download online  
honlix.com](http://HLK-220.download.online.honlix.com)

## HLK-221

- 强启 方形 250A 综合单螺纹 H62/PA66 孔距23\*23
- Qiangqi Square 250A Tapered Signal Thread H62/PA66 Hole Pitch 23\*23

### 应用领域 Application Areas

- 启停电源与通讯连接传输
- Start-stop power and communication connection transmission

### 产品功能特点 Product Points

- 支持瞬间大电流使用场景
- Supports instantaneous high current usage scenarios
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





### 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 250A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 250A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension

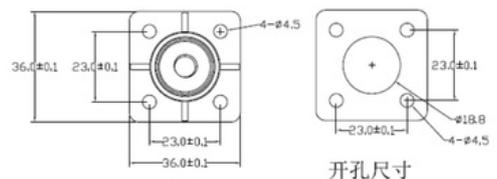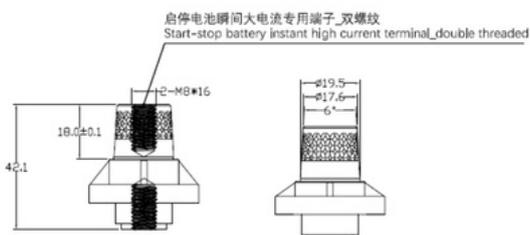

负极/Negative pole  
推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-221 download online  
honlix.com](http://HLK-221.download.online.honlix.com)

## HLK-222

- 方形 300A 双螺纹 H62/PA66 孔距33\*33
- Square 300A Double Thread H62/PA66 Hole Pitch 33\*33

### 应用领域 Application Areas

- 启停电源与通讯连接传输
- Start-stop power and communication connection transmission

### 产品功能特点 Product Points

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





### 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 300A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 300A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension

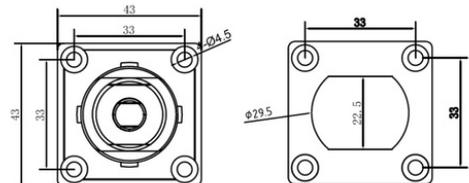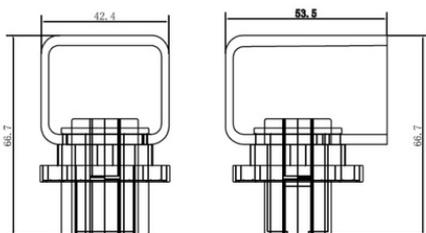

开孔尺寸  
Hole Size  
推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-222 download online  
honlix.com](http://honlix.com)

## HLK-223

- 方形 300A 单螺纹 H62/PA66 孔距33\*33
- Square 300A Signal Thread H62/PA66 Hole Pitch 33\*33

### 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

### 产品功能特点 Product Points

- 支持瞬间大电流使用场景
- Supports instantaneous high current usage scenarios
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





### 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 300A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 300A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension

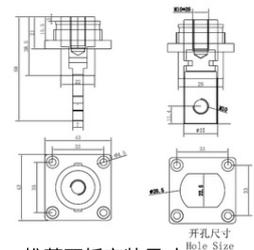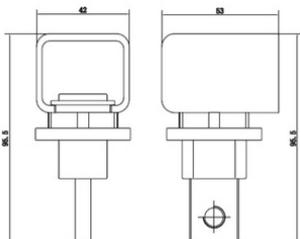

推荐面板安装尺寸

Recommended Panel Mounting Dimensions

[HLK-223 download online honlix.com](https://www.honlix.com)

## HLK-224

- 方形 500A 双螺纹 紫铜/PA66 孔距33\*33
- Square 300A Double Thread Red Copper/PA66 Hole Pitch 33\*33

### 应用领域 Application Areas

- 启停电源与通讯连接传输
- Start-stop power and communication connection transmission

### 产品功能特点 Product Points

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





### 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 500A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 500A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

### 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

### 产品尺寸 Product dimension

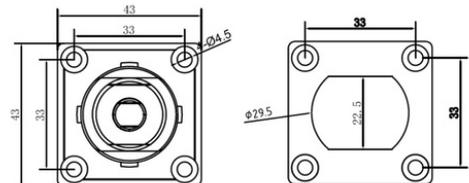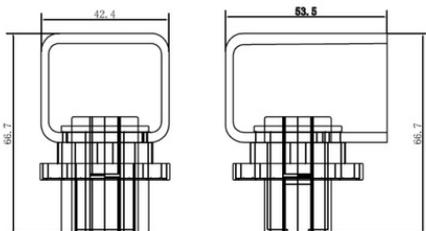

开孔尺寸  
Hole Size  
推荐面板安装尺寸  
Recommended Panel Mounting Dimensions

[HLK-224 download online  
honlix.com](http://honlix.com)

## HLK-225

- 方形 300A 单螺纹 紫铜/PA66 孔距33\*33
- Square 300A Single Thread Red Copper/PA66 Hole Pitch 33\*33

## 应用领域 Application Areas

- 储能电源与通讯连接传输
- Energy storage power supply and signal connection transmission

## 产品功能特点 Product Points

- 支持瞬间大电流使用场景
- Supports instantaneous high current usage scenarios
- 快速直接插拔
- Fast direct plugging and unplugging
- 体积小
- Very small in size





## 技术参数 Technical Data

- |                          |                |                          |               |
|--------------------------|----------------|--------------------------|---------------|
| • 额定电流:                  | 300A           | • 端子接线方式:                | 锁螺丝           |
| • Rated current:         | 300A           | • Terminal Connection:   | Locking screw |
| • 额定电压:                  | 600V DC        | • 盐雾测试:                  | 48 H          |
| • Rated voltage:         | 600V DC        | • Salt spray resistance  | 48 H          |
| • 绝缘电阻:                  | ≥500MΩ         | • 耐电压 :                  | 1000V DC      |
| • Insulation resistance: | ≥500MΩ         | • Withstand voltage :    | 1000V DC      |
| • 阻燃等级:                  | UL94V-0        | • 机械寿命:                  | ≥3000 次       |
| • Flame retardant rating | UL94V-0        | • Flame retardant rating | ≥3000 cycles  |
| • 使用环境:                  | -40°C ~ +105°C | • 中心孔紧固力:                | ≥9N Max       |
| • Operating temperature: | -40°C ~ +105°C | • Locking force:         | ≥9N Max       |
| • 防护等级:                  | N/A            | • 环保等级:                  | RoHS          |
| • IP grade:              | N/A            | • Environmental grade:   | RoHS          |

## 商务条款 Terms of business

- |         |             |                      |           |
|---------|-------------|----------------------|-----------|
| • 起订量:  | 1 pcs       | • 交货条款:              | Ex works  |
| • MOQ   | 1 pcs       | • Terms of delivery: | Ex works  |
| • 交货周期: | 2周 (紧急订单1周) | • 海关编码:              | 854422100 |
| • L/T   | 2 weeks     | • HS code:           | 854422100 |

## 产品尺寸 Product dimension

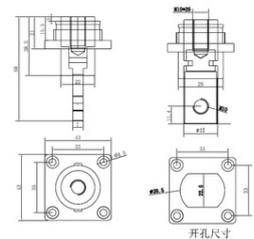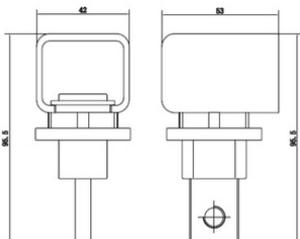

推荐面板安装尺寸

Recommended Panel Mounting Dimensions

[HLK-225 download online  
honlix.com](https://www.honlix.com)

# HONLIX

为储能提供创新连接解决方案

Innovative connectivity solutions for energy storage

**Honlix Inc.**

**Tel:** +86-0512-57445295

**Fax:** +86-0512-57440096

**E-mail:** [info@honlix.com](mailto:info@honlix.com)

**http://**[www.honlix.com](http://www.honlix.com)

**Zip code:** 215 300

**Add:** No 570, Dewang Road, Zhangpu Town, Kunshan City, Jiangsu Province, China.