
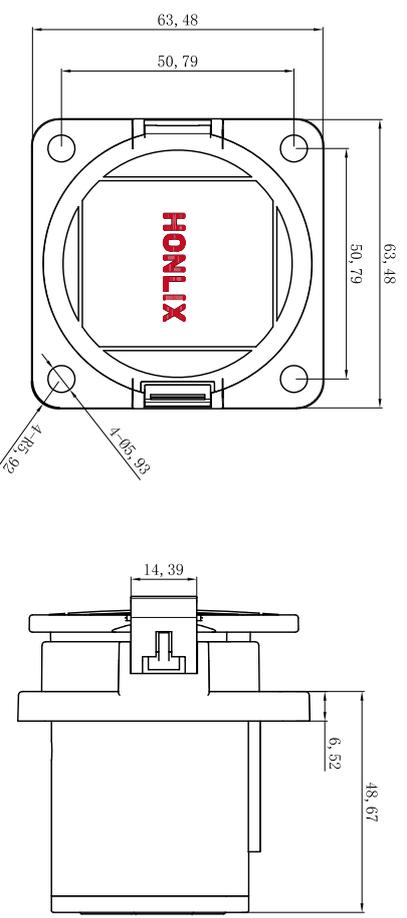


REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			

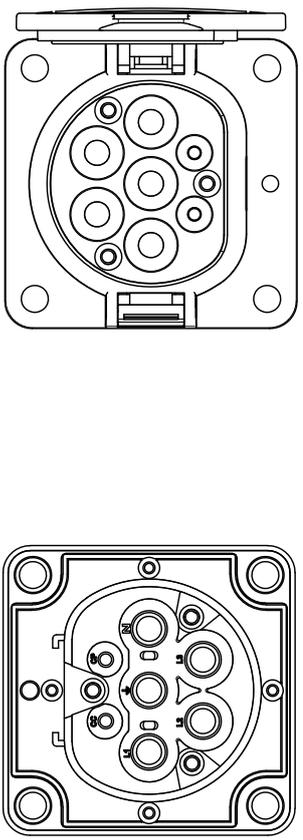

SPECIFICATION

Rated Operating Voltage	250V
Rated Current	16A/32A
Peak Current	N/A
Insulation Resistance	500MΩ/250V
Withstand Voltage/AC	2500V Power/1500V/Signal
Durability	10000 Cycles
IP Rating	Material:IP23 Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40℃~125℃
UV Resistance Grade	N/A
Mating Part No	HLK-601
Maximum Cable Range	OD≤2.76mm/1.8mm

TERMS OF BUSINESS

MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION

0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

HONLIX HONLIX INC.
 HTTP://WWW.HONLIX.COM

SIGNATURE
 ENGINEER BY: Mandy Hoo
 MANAGER BY: John Hgn
 CHECKED BY: David Wang
 SEALES BY: Eleven Wang

PRODUCT NO:HLK-XXX
 UNIT: mm
 SHEET: 1 OF 1
 DATE: 2025.12.16
 H/C: HLK-602-1
 REV. 0

NO.	ITEM	DESCRIPTION	QTY
①	HLK-602-1	GB/T AC 16A/32A 250V Socket	1PCS

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.