

C/N: HLK

P/C:HLK-538



P/N:HLK-538

CUSTOMER REV:

APPROVED BY:

REVISIONS

REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			

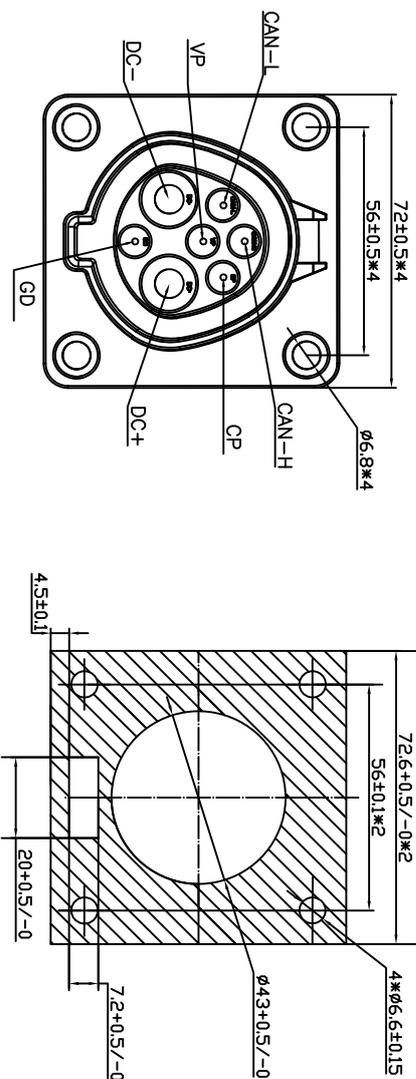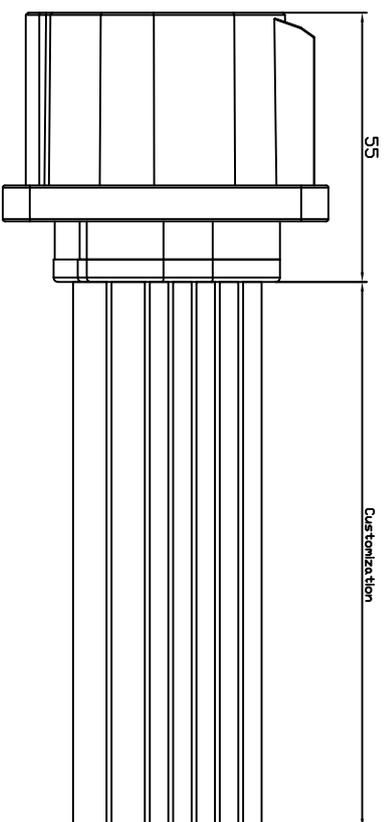

SPECIFICATION

Rated Operating Voltage	Power: DC 120V Signal: DC 30V
Rated Current	500mA 2500mA (V_L=20V/50V/70V/100V/150V/180V)
Peak Current	N/A
Insulation Resistance	500MΩ/120V DC
Withstand Voltage/AC	2500V Power/1500V/Signal
Durability	5000 Cycles
IP Rating	Mated:IP55 Unmated:N/A
Salt Spray	5% NaCl, 48H
Flame Class	UL94 V-0 (Material)
Operating Temperature	-40℃~105℃
UV Resistance Grade	N/A
Mating Part No	HLK-537
Maximum Cable Range	OD_C≤32mm

TERMS OF BUSINESS

MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMATED TOLERANCE DEFINATION

0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE

ENGINEER BY:	Mandy hao
MANAGER BY:	John Han
CHECKED BY:	David Wang
SEALERS BY:	Eleven Wang

HONLIX[®] HONLIX INC.
HTTP://WWW.HONLIX.COM

PRODUCT NO: HLK-538

DATE: 2026.02.23

UNIT: mm

SHEET: 1 OF 1

REV.

H/C: HLK-538

0

①	HLK-538	2+SPIN Charging Socket IEC62196-6, IS17017_2_6, CNS16127	1PCS
NO.	ITEM	DESCRIPTION	QTY

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.