


C/N: HLK    P/C:    P/N: 国标枪转欧标枪16A 5M    CUSTOMER REV:    APPROVED BY:

REVISIONS			
REV.	DESCRIPTION	DATE	SIGANTURE
△			
△			
△			

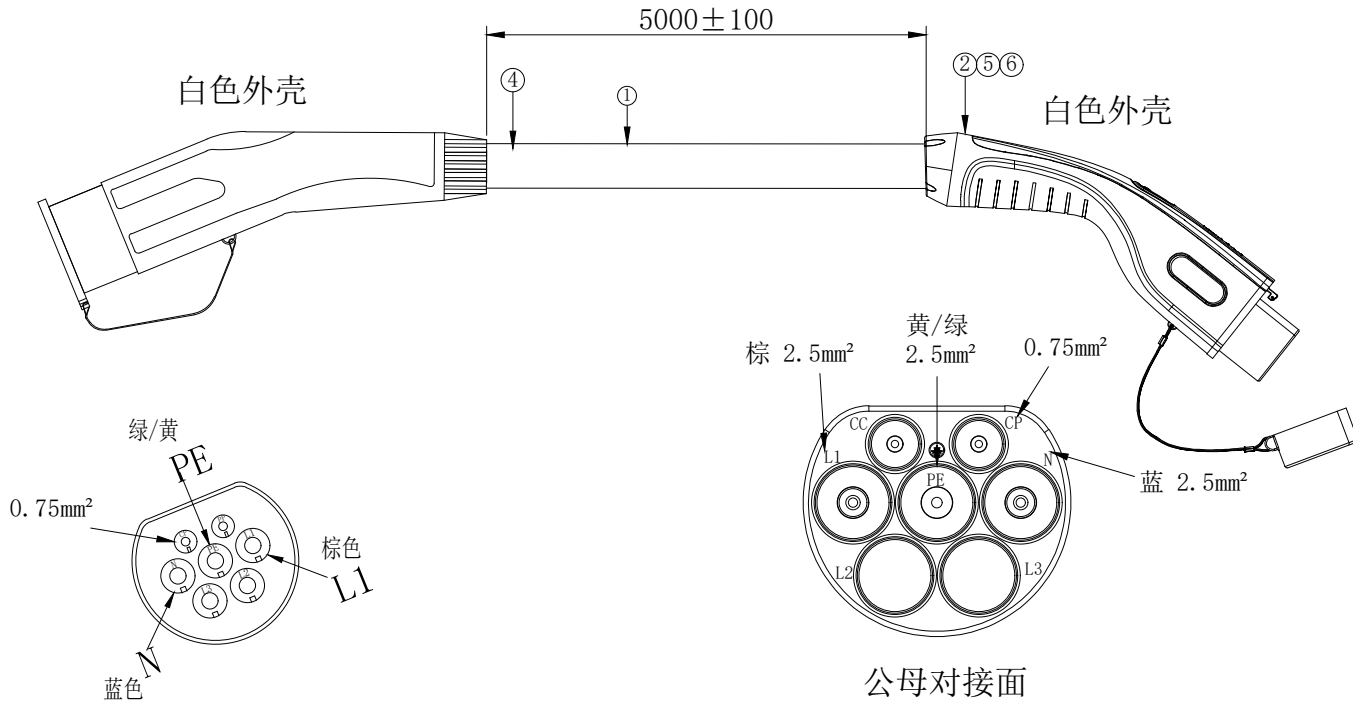

**NOTE:**

- Rated current: Power: 16A Signal: 2A  
额定电流: 电源: 16A 信号: 2A
- 100% electrical testing. (Conduction, short circuit, open circuit, incorrect PIN)  
100%电气测试. (导通, 短、断路、错PIN)
- Mechanical operation:  $\geq 5000$  cycles  
插拔寿命:  $\geq 5000$  次

PE、PP用0.5mm<sup>2</sup>红线  
(裁线70mm)接电阻(加套管)  
RC等效电阻680Ω 0.5W

欧标枪	颜色	国标枪
L1	棕 2.5mm <sup>2</sup>	L1
L2	/	L2
L3	/	L3
N	蓝 2.5mm <sup>2</sup>	N
PE	黄/绿 2.5mm <sup>2</sup>	PE
CP	0.75mm <sup>2</sup>	CP
PP	/	CC

不接电阻

SIGNATURE		HONLIX <sup>®</sup> HONLIX INC. HTTP://WWW.HONLIX.COM	
ENGINEER BY:		PRODUCT NO:	DATE: 2023.6.9
MANAGER BY:		UNIT: mm	SHEET: 1 OF 1
CHECKED BY:		H/C: HLK-620	
SEALES BY:		REV. 0	